

GPM 58 ESR

适用于强力塑料射出对韧性、耐磨性、长寿命要求，适用于冷作与热模具小、中型模具，镶件、冲、切、螺纹、热剪压铸模。

材料特性	钢材编号/钢种	SWG GPM58 VICTORY ESR						
	简称	X50CrMoV5-2						
	类似钢种	-						
	参考化学成分 [%]	C	Si	Mn	Cr	Mo	V	Ni
		0.5	≤ 0.5	0.5	5.0	2.2	0.7	添加
	生产工艺	EAF/LF/VD/ESR, 锻造, 退火						
	使用硬度 / 抗拉强度			HB	HRC		N/mm²	
				-	54 - 58		-	
	交货状态	退火		≤ 250		-		-
	最大尺寸	直径				厚度		
-				≤ 400 mm				
超声波探伤	EN 10228-3				SEP 1921			
	表格3 - 类型1 - 品质等级4				组别3 - 等级E,e			
纯净度	DIN 50602				ASTM E45 方法 A			
	K1 ≤ 10				A ≤ 0.5; B, C, D ≤ 1			

工艺性能		0	1	2	3	4	5	注解
	韧性		■	■	■			在 54 - 58 HRC硬度区间
	高温强度		■	■	■	■	■	
	耐磨性		■	■	■	■	■	
	耐腐蚀性	■						
	机械加工性能		■	■				退火
	抛光性能		■	■	■	■		ISO/SPI: N1/A-1
	焊接性能		■					根据DIN EN 1011-2, CET = 1.03 %
	晒纹性能		■	■	■			
	氮化性能		■	■	■	■	■	氮化硬度 900 - 1250 HV1
	镀铬性能		■	■	■	■	■	高纯净度

评分标准：0=不适合；1=较差；2=一般；3=良好；4=很好；5=非常好

物理性能	热传导性 [W · m ⁻¹ · K ⁻¹]	20 °C	200 °C	300 °C	400 °C	500 °C
		23.5	27.3	28.2	28.7	29.3
	热膨胀系数 20°C至对应温度 [10 ⁻⁶ · K ⁻¹]	100 °C	200 °C	300 °C	400 °C	
		12.6	12.7	13.0	13.4	
	弹性模量 [kN/mm ²]	20 °C	200 °C	300 °C	500 °C	
		195	-	-	-	


应用	适用于	注塑模制作，冷作及热作应用
	模具种类	增强型塑胶注塑，热成型，剪切，滚丝，热剪，压铸的模具及镶件
	使用温度	< 600 °C
	模具尺寸	中小型模具
	最终产品	高强度塑料零件，剪片，螺栓，结构件
	特征	适用于对强度、韧性、耐磨性、使用寿命要求高的模具

SWG钢厂工艺指导	真空淬火
-----------	------


热处理		温度最小值 [°C]	温度最大值 [°C]	介质 / 注解
	退火	800	850	炉冷至650°C, 空气
	淬火	1010	1040	油, 真空
	回火	530	600	空气, 保护气氛
	去应力	500	600	至少比回火温度低30°C
	焊前预热	300	320	
	氮化	480	550	至少比回火温度低30°C
	PVD处理	480	550	

曲线图/ 组织	CCT曲线图	有
	回火曲线图	有
	热处理建议	粗加工后真空淬火
	显微组织	马氏体

回火曲线图：试样尺寸为20mm×28mm×36mm；淬火温度1025℃和1040℃（1个小时），风冷

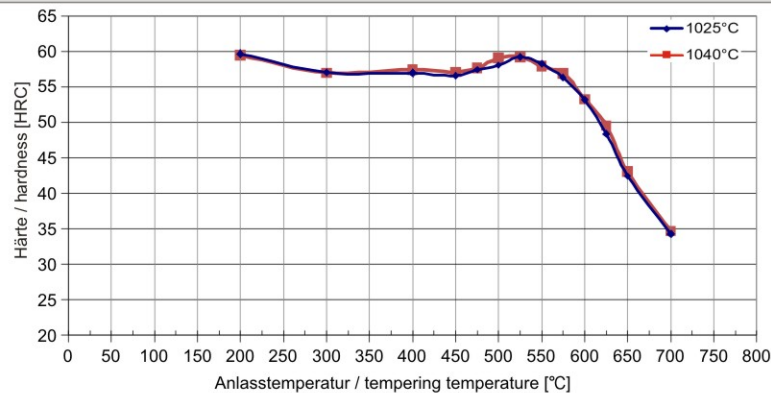

CCT曲线图:

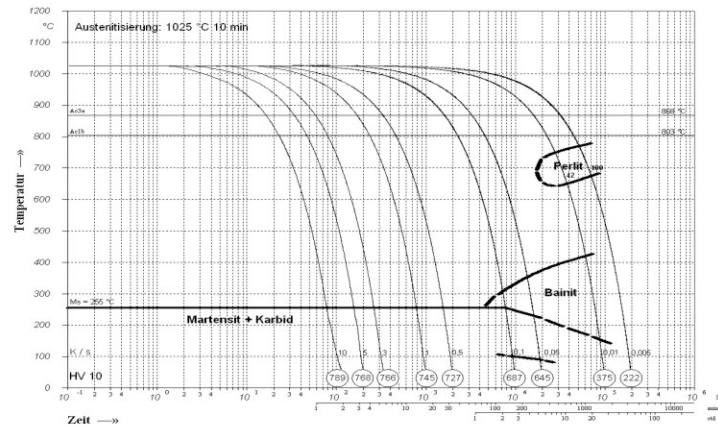

请注意: 此数据表中的信息无法法律约束力, 仅作为用户的首次阅览指导。因此, 我们并没有义务对数据进行更正、完善或更新。涉及具体订单, 产品的性能数据应参照相应的合同。

德国葛利兹钢厂

德标钢种
Din Grades

应用 Application	交付状态 Delivery Condition	钢种 Grade	化学成分 % Typical SWG analysis in w%						硬度(表面) Service hardness (surface)
			C	Cr	Mo	Ni	V	其它 Others	
塑胶钢 Plastic Mold Steels	预硬 Q+T	2311	0.40	2.00	0.20	-	-	-	28-34 HRC
		2312	0.40	1.90	0.20	-	-	S~0.05	28-34 HRC
		2738 / 2738H / 2738HH	0.36	1.80	0.20	1.10	-	-	30-38 HRC
		2711mod	0.55	1.10	0.80	2.00	0.10	-	36-42 HRC
		2714	0.55	1.10	0.50	1.70	0.10	-	38-44 HRC
	退火annealed	2767	0.45	1.25	0.20	3.90	-	-	49-53 HRC
不锈钢 Corrosion Resistant Steels	预硬 Q+T	2085	0.33	16.00	-	<1.00	-	S~0.08	28-34 HRC
		2316	0.35	15.50	1.00	0.50	-	-	28-34 HRC
		2316 VICTORY ESR	0.35	15.50	1.00	0.50	-	-	28-34 HRC
		2316mod VICTORY ESR	0.26	15.00	1.00	0.70	-	-	28-34 HRC
	预硬 Q+T	2083	0.40	13.00	-	-	-	-	32-52 HRC
		2083 VICTORY ESR	0.40	13.00	-	-	-	-	32-52 HRC
		2083mod VICTORY ESR	0.38	13.00	-	-	0.25	添加 alloyed	29-52 HRC
	退火annealed								
热作钢 Hot Work Steels	超精细化 退火 EFS-annealed	2343 / EX3	0.36	5.00	1.20	-	0.40	-	36-52 HRC
		2343 VICTORY ESR	0.36	5.00	1.20	-	0.40	-	36-52 HRC
		2344 / EX4	0.40	5.20	1.30	-	1.00	-	36-52 HRC
		2344 VICTORY ESR	0.40	5.20	1.30	-	1.00	-	36-52 HRC
		2367 VICTORY ESR	0.36	5.10	2.80	-	0.55	-	35-52 HRC
冷作钢 Cold Work Steels	退火 annealed	2357	0.50	3.30	1.50	-	0.25	-	52-56 HRC
		2379	1.55	12.00	0.90	-	0.90	-	58-62 HRC

葛利兹钢种
SWG Grades

交付状态 Delivery Condition	钢种 Grade	化学成分 % Typical SWG analysis in w%						硬度(表面) Service hardness (surface)
		C	Cr	Mo	Ni	V	其它 Others	
预硬 Q+T	738HH	0.27	1.35	添加 alloyed	1.00	-	添加 alloyed	32-38 HRC
	XPM	0.27	1.35	0.50	1.00	-	添加 alloyed	38-42 HRC
	XPM VICTORY ESR	0.30	1.35	0.70	1.00	-	添加 alloyed	38-42 HRC
	CPM40 VICTORY ESR	0.15	4.00	1.10	3.00	-	添加 alloyed	38-42 HRC
	GEST80 VICTORY ESR	0.14	0.30	0.30	2.80	-	Cu, Al	38-42 HRC
退火annealed	GPM58 VICTORY ESR	0.50	5.00	2.20	添加 alloyed	0.70	-	54-58 HRC
预硬 Q+T	CPM50 VICTORY ESR	0.28	14.00	-	0.60	-	N	38-42 HRC
退火 annealed	CRMHP VICTORY ESR	0.25	14.00	-	0.60	-	N	50-52 HRC
	OPTI N+ PESR	0.15	14.00	-	0.60	-	N	50-57 HRC
	HNS28 PESR	0.25	14.00	-	0.60	-	N	57-59 HRC
	HNS40HC PESR	0.40	15.00	2.00	<0.50	<1.50	N	58-60 HRC
	Cronidur®30 PESR	0.30	15.00	1.00	0.50	-	N	58-60 HRC
退火 annealed	EX1 VICTORY ESR	0.35	5.00	2.20	-	0.55	-	40-52 HRC
	2343PLUS VICTORY ESR	0.38	5.00	1.80	-	0.55	-	40-52 HRC
	EX55 VICTORY ESR	定制产品 Customized Steel						40-52 HRC
	EX6 VICTORY ESR	0.43	6.40	1.30	-	0.90	-	52-56 HRC

葛利兹钢材特性-应用参考表

Gröditz Steel Characteristic- Application Reference

特性比例(Characteristic ratio)： 0=不适合(NA) / 1=低度(LOW) / 2=中度(Medium) / 3=好(Good) / 4=很好(Very good) / 5=非常好(Excellent)

Grade 钢种	Chemical Composition (%)化学成分-範圍值							Machin-Ability 机加性能							Polish-Ability 抛光性能							Grain-Ability 蚀纹性能							Wear-Ability 耐磨性能							Weld-Ability 焊接性能						
	C	Si	Mn	Cr	Mo	Ni	Others																																			
								0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5					
2311	0.40	0.30	1.50	2.00	0.20																																					
2312	0.40	0.30	1.50	1.90	0.20		S:0.05																																			
2738	0.36	0.25	1.50	1.80	0.20	1.10																																				
738HH	0.27	0.30	1.35	1.35	add	1.00	add																																			
XPM	0.27	0.30	1.55	1.35	0.50	1.0	add																																			
XPM ESR	0.30	0.30	1.55	1.35	0.70	1.00	add																																			
2711	0.55	0.25	0.70	0.70	0.30	1.70	V:0.1																																			
2714	0.55	0.25	0.70	1.10	0.50	1.70	V:0.1																																			
GEST 80 ESR	0.14		1.40	0.30	0.30	2.80	Cu:0.9 Al:0.3																																			
CPM 40	0.15	0.30	0.50	4.00	1.10	3.00	add																																			
2343(EX3)	0.36	1.00	0.35	5.00	1.20		V:0.4																																			
2343(EX3) ESR	0.36	1.00	0.35	5.00	1.20		V:0.4																																			
2344(EX4)	0.4	1.00	0.40	5.20	1.30		V:1.0																																			
2344(EX4) ESR	0.4	1.00	0.40	5.20	1.30		V:1.0																																			
2767	0.45	0.25	0.35	1.25	0.20	3.90																																				
GPM 58 ESR	0.5	≤0.5	0.50	5.00	2.20		V:0.7 Ni +																																			

交货状态 Delivery Status : (字段颜色 field color)--- 蓝色 : 预硬模具钢料(Pre-hardened steel) / 黄色 : 退火模具钢料(Anneal steel)

※ 本表所载数据信息是根据我们的知识水平所编写，目的是提供对我们产品使用的一般建议此不视当作是产品质量特性的保证，每一个葛利兹钢料的用户应当自己判断选择葛利兹产品的适用性。

葛利兹钢材特性-应用参考表

Gröditz Steel Characteristic- Application Reference

特性比例(Characteristic ratio) : 0=不适合(NA) / 1=低度(LOW) / 2=中度(Medium) / 3=好(Good) / 4-很好(Very good) / 5=非常好(Excellent)

Grade 钢种	Chemical Composition (%)化学成分-範圍值							Corrosion resistance 耐腐蝕能力							Toughness 韧性							Chrome platability 镀铬性能							Nitridability 氮化性能																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
	C	Si	Mn	Cr	Mo	Ni	Others																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
								0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
2311	0.40	0.30	1.50	2.00	0.20																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																

交货状态 Delivery Status : (字段颜色 field color)--- : 预硬模具钢料(Pre-hardened steel) / : 退火模具钢料(Anneal steel)

※ 本表所载资料的信息是根据我们的知识水平所编写, 目的是提供对我们产品使用的一般性建议因此不当视为是产品质量特性的保证, 每一个葛利兹钢料的用户应当自己判断选择葛利兹产品的适用性。

葛利兹不锈钢钢材系列特性-应用参考表

Gröditz Steel Characteristic- Application Reference

特性比例(Characteristic ratio) : 0=不适合(NA) / 1=低度(LOW) / 2=中度(Medium) / 3=好(Good) / 4=很好(Very good) / 5=非常好(Excellent)



Grade 钢种	Chemical Composition (%)化学成分-范围值							Machin-Ability 机加性能						Polish-Ability 抛光性能						Grain-Ability 蚀纹性能						Wear-Ability 耐磨性能						Weld-Ability 焊接性能					
	C	Si	Mn	Cr	Mo	Ni	Others	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5
2316	0.35	0.35	0.70	15.50	1.00	0.50																															
2085	0.33	≤1.00	≤1.00	16.00		≤1.00	S:0.08																														
CPM50 ESR	0.28	0.30	0.40	14.00		0.60	+N																														
2083	0.40	0.40	0.70	13.00																																	
2083 ESR	0.40	0.40	0.70	13.00																																	
2083 mod ESR	0.38	1.00	0.50	13.00			V:0.25																														
CRMHP	0.25	0.30	0.40	14.00		0.60	+N																														
OPTI N+	0.15	0.30	0.40	14.00		0.60	+N																														
Grade 钢种	Chemical Composition (%)化学成分-范围值							Corrosion resistance 耐腐蚀能力						Toughness 韧性						Chrome platability 镀铬性能						Nitridability 氮化性能											
	C	Si	Mn	Cr	Mo	Ni	Others	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5						
2316	0.35	0.35	0.70	15.50	1.00	0.50																															
2085	0.33	≤1.00	≤1.00	16.00		≤1.00	S:0.08																														
CPM50 ESR	0.28	0.30	0.40	14.00		0.60	+N																														
2083	0.40	0.40	0.70	13.00																																	
2083 ESR	0.40	0.40	0.70	13.00																																	
2083 mod ESR	0.38	1.00	0.50	13.00			V:0.25																														
CRMHP ESR	0.25	0.30	0.40	14.00		0.60	+N																														
OPTI N+	0.15	0.30	0.40	14.00		0.60	+N																														


交货状态 Delivery Status : (字段颜色 field color)--- : 预硬模具钢料(Pre-hardened steel) / : 退火模具钢料(Anneal steel)

※ 本表所载资料的信息是根据我们的知识水平所编写, 目的是提供对我们产品使用的一般性建议因此不当视作是产品质量特性的保证, 每一个葛利兹钢料的用户应当自己判断选择葛利兹产品的适用性。


Plastic 塑料		Plastic type 胶料种类	Recommendation 推荐	
			Steel grade 钢种	Hardness 硬度
Normal plastic 常用型胶料	Without corrosion 不带腐蚀性	PP, ABS, PE ,PS ,	2738/2738H 738HH XPM/XPMESR 2343/2344(EX3/EX4) 2343ESR/2344ESR(EX3ESR/EX4ESR) 2083/2083ESR	HRC29-38 HRC32-38 HRC35-42 HRC44-52 HRC48-52 HRC42-52
	With corrosion 带腐蚀性	PVC, POM , PA, SAN,PMMA	2316 2083/2083ESR CRMHP OPTI N+	HRC28-34 HRC42-52 HRC50-52 HRC54-57
Special plastic 特殊添加型胶料	+ < Plastic +GF% or Talc 加玻签或滑石粉.... 增强塑料	+ < 30% GF(Glass Fiber) or Talc 加 30%以下的增强型胶料	2738/2738H 738HH XPM/XPMESR GEST80 CPM40	HRC29-38 HRC32-38 HRC35-42 HRC38-42 HRC38-42
		+ > 30% GF(Glass Fiber) or Talc 加 30%以上的增强型胶料	2343/2344(EX3/EX4) 2343ESR/2344ESR(EX3ESR/EX4ESR) 2083/2083ESR CRMHP OPTI N+ GPM58	HRC48-52 HRC48-52 HRC42-52 HRC50-52 HRC54-57 HRC54-58
	Plastic + fire retardant 阻燃增强胶料	Added Cl-,Br-,P3- based fire retardant product 添加 Cl-,Br,P3-基阻燃剂胶料	2316 2083/2083ESR CRMHP OPTI N+	HRC28-34 HRC42-52 HRC50-52 HRC54-57

※ 本表所载资料的信息是根据我们的知识水平所编写，目的是提供对我们产品使用的一般性建议因此不当视为是产品质量特性的保证，每一个葛利兹钢料的用户应当自己判断选择葛利兹产品的适用性。

Normal Texturing
SWG 738HH

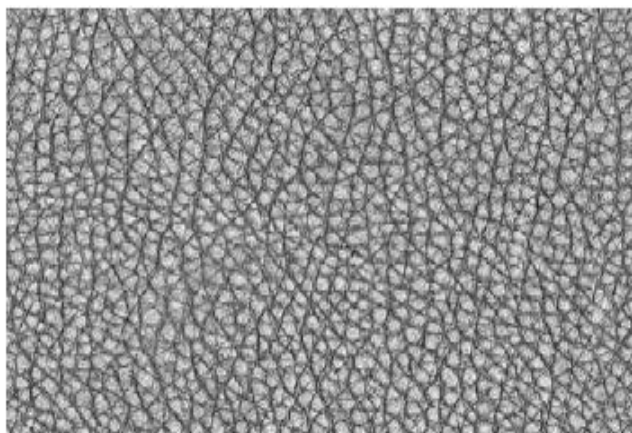


High Texturing
SWG XPM

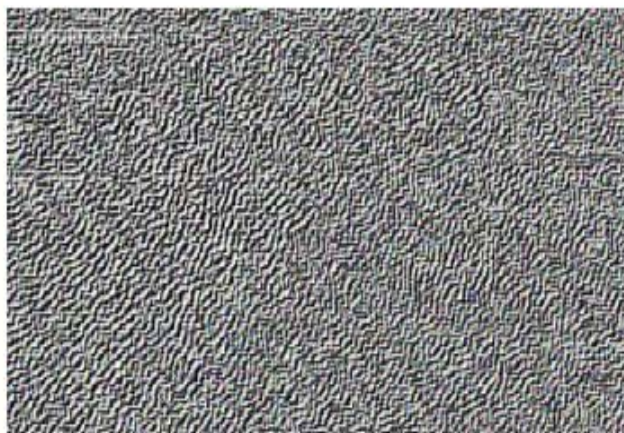

Fine and Geometric Texturing
SWG 2083ESR, CRMHP ESR, GEST80 ESR



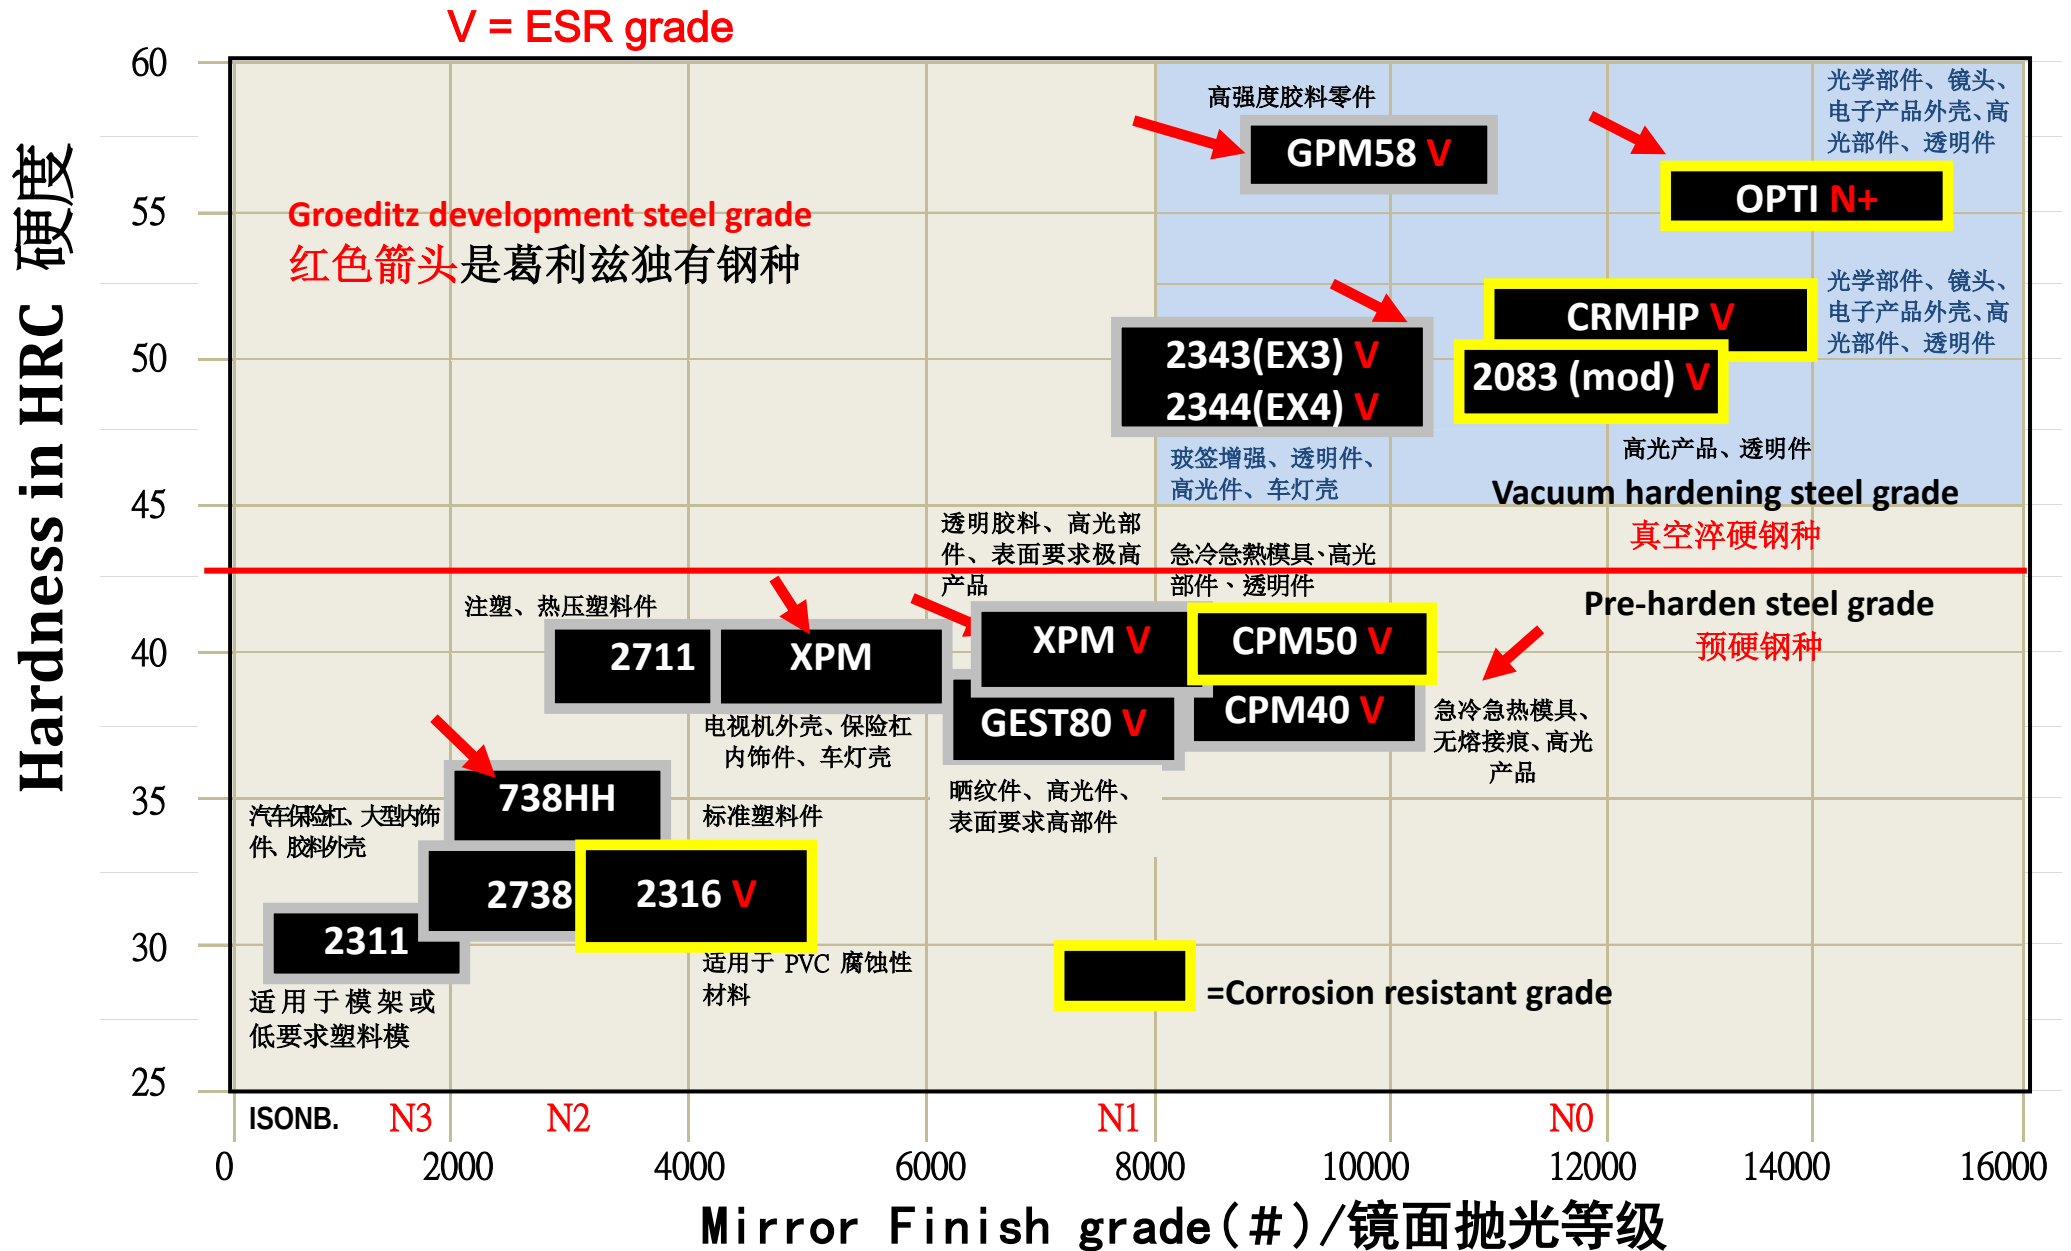



葛利兹钢材-压铸模选材建议 Gröditz Steel - Recommendations for Die Casting

Grade 钢种	Characteristics and application 性能特点及应用
2343 VICTORY ESR	欧洲常用钢种，低偏析率，高韧性，高热传导系数，适用于大型模具。 Standard grade in Europe, low segregation, high toughness, good thermal conductivity, save solution for large moulds.
2344 VICTORY ESR	北美及亚洲常用钢种，适用于耐高温负荷要求、高耐磨性要求、易产生热龟裂模具。 Standard grade in NA and ASIA, for thermal high loaded tools, for tools with higher wear resistance, for heat checking sensitive moulds.
EX8 VICTORY ESR 2343 Plus	2343 的改良钢种，具有比 2343 更好的韧性、抗龟裂性及耐磨性，纯净度极高，适用于中大型模具。 Improved 2343 but higher in toughness, crack resistance and hot-strength, super clean metallurgy, applicable to medium and large moulds.
EX1 VICTORY ESR	高性能热作模具钢，具有优异的抵抗热龟裂、整体开裂、热磨损和塑性变形的性能，适用于长寿命模具。 High performance hot work die steel with excellent resistance to thermal cracking, overall cracking, thermal wear and plastic deformation, suitable for long life molds.
2367 VICTORY ESR	适用于耐超高温负荷要求、极高耐磨性要求、极易产生热龟裂的中小型模具。 For very thermal high loaded inserts, for moulds with highest wear senility, for extremely heat checking sensitive moulds.
GPM58 VICTORY ESR	适用于耐超高温负荷要求、极高耐磨性要求的小型模具及镶件，锌合金模具。 For small moulds and inserts with requirements of high temperature load resistance and high wear resistance, zinc alloy molds.
>6,000T 一体压铸模具 （后地板，前舱，电池托盘等） Over 6,000T Giga casting mold (Rear body, front cabin, battery tray, etc.)	
2343 VICTORY ESR EX8 VICTORY ESR EX1 VICTORY ESR	
2,500-4,500T 传统结构件 （减震塔，纵梁，仪表盘支架，多合一电驱壳体等） 2,500-4,500T traditional structural components mold(shock tower, longitudinal beam, instrument panel bracket, electric drive housing, etc.)	
2343 VICTORY ESR EX8 VICTORY ESR EX1 VICTORY ESR	
<2,500T 中型模具 （离变壳，电机壳等） Medium mold within 2500T(Gear box, motor housing, etc.)	
2344 VICTORY ESR EX8 VICTORY ESR EX1 VICTORY ESR	
小型模具及镶块 Small molds and inserts	
2344 VICTORY ESR EX1 VICTORY ESR 2367 VICTORY ESR GPM58 VICTORY ESR	



Schmiedewerke Gröditz
GMH GRUPPE



万 润 利
广东 · 山东 · 浙江
— 德国葛利兹专卖



3250 N Arlington Heights Road
Suite 101
Arlington Heights, IL 60004
T: 847.279.0001
F: 847.279.0002

www.diecasting.org
nadca@diecasting.org

January 4th, 2021

Tom Bell

Gröditz Steel North America

A subsidiary of Schmiedewerke Gröditz GmbH

21660 W. Field Parkway

Deer Park, IL 60010

Dear Tom,

This letter is in regards to the two Specimens SWG EX1+EX55 VICTORY ESR and SWG 2344 VICTORY ESR, that were submitted for approval to the NADCA 229-2018 "Special Quality Die Steel & Heat Treatment Acceptance Criteria for Die Casting Dies".

Schmiedewerke Gröditz GmbH, Germany submitted 2 specimens to be tested to the NADCA 229-2018 Standard.

1) Premium Class C - SWG EX1 VICTORY ESR

Premium Class C - SWG EX55 VICTORY ESR

2) Premium Class B - SWG 2344 VICTORY ESR

The testing results were completed by Element labs, 194 Internationale Blvd, Glendale Heights, Illinois 60139 and Case Western Reserve University.

A summary follows:

SWG EX1 VICTORY ESR Premium Class C

SWG EX55 VICTORY ESR Premium Class C

Microcleanliness - Pass

ASTM Grain size - 9.5

Banding - Pass

Charpy Values - 24, 22, 24 - Pass

Fatigue Test (CWRU) - Pass

Overall Evaluation - Pass

SWG 2344 VICTORY ESR Premium Class B

Microcleanliness - Pass

ASTM Grain size - 7.5

Banding - Pass

Charpy Values - 17, 18, 18 - Pass

Fatigue Test (CWRU) - Pass

Overall Evaluation - Pass

Regards,

Paul Brancalion,
Director of Research, Education and Technology
North American Die Casting Association

葛利兹提交了 EX1 ESR 试样按照
NADCA229-2018 标准进行测试
SWG EX1 VICTORY ESR 优质 C 类
纯净度-通过
ASTM 标准晶度-9.5
带状偏析-通过
夏比冲击值-24,22,24-通过
疲劳测试(CWRU)-通过
整体评估-通过



3250 N Arlington Heights Road
Suite 101
Arlington Heights, IL 60004
T: 847.279.0001
F: 847.279.0002

www.diecasting.org
nadca@diecasting.org

October 3, 2023

Tom Bell

GMH Group

Gröditz Forgings & ETE

21660 W. Field Parkway

Deer Park, IL 60010

Tom,

This letter is in regards to the one specimen of Schmiedewerke Gröditz - SWG 2343 VICTORY ESR (Grade D) H13 that was submitted for approval to the NADCA #207-2022 "Special Quality Die Steel & Heat Treatment Acceptance Criteria for Die Casting Dies".

Schmiedewerke Gröditz GmbH submitted 1 specimen to be tested to the NADCA #207-2022 Standard.

1) Type H11 - 2343 (Grade D) Din 1.2343 ESR Material

\

The testing results were completed at Element labs, 194 Internationale Blvd, Glendale Heights, Illinois 60139 and Case Western Reserve University. These results are attached to this document.

A summary follows.

Schmiedewerke Gröditz - 2343 VICTORY ESR, Din 1.2343

ASTM E45 - Microcleanliness - Acceptable

ASTM E112 Micro examination Grain size - 9.5 Acceptable

Charpy Values - at 76 °F, 15, 15, 13 - Average of 14.3 - Pass

ASTM E3-11 (17) - Banding - Acceptable, Structure - Acceptable

ASTM E18-22 Hardness Test - Pass

Fatigue Test (CWRU) - Pass

Case Western Reserve University will provide a graph of results upon request.

Overall Evaluation - Pass

If you have additional questions, Please let me know.

Regards,


Paul Brancalion,
Executive Director of Research, Education and Marketing
North American Die Casting Association

葛利兹提交了 2344 ESR 试样按照
NADCA229-2018 标准进行测试
SWG 2344 VICTORY ESR 优质 B 类
纯净度-通过
ASTM 标准晶度-7.5
带状偏析-通过
夏比冲击值-17,18,18-通过
疲劳测试(CWRU)-通过
整体评估-通过



压铸应用

Schmiedewerke Gröditz — Die Casting Application

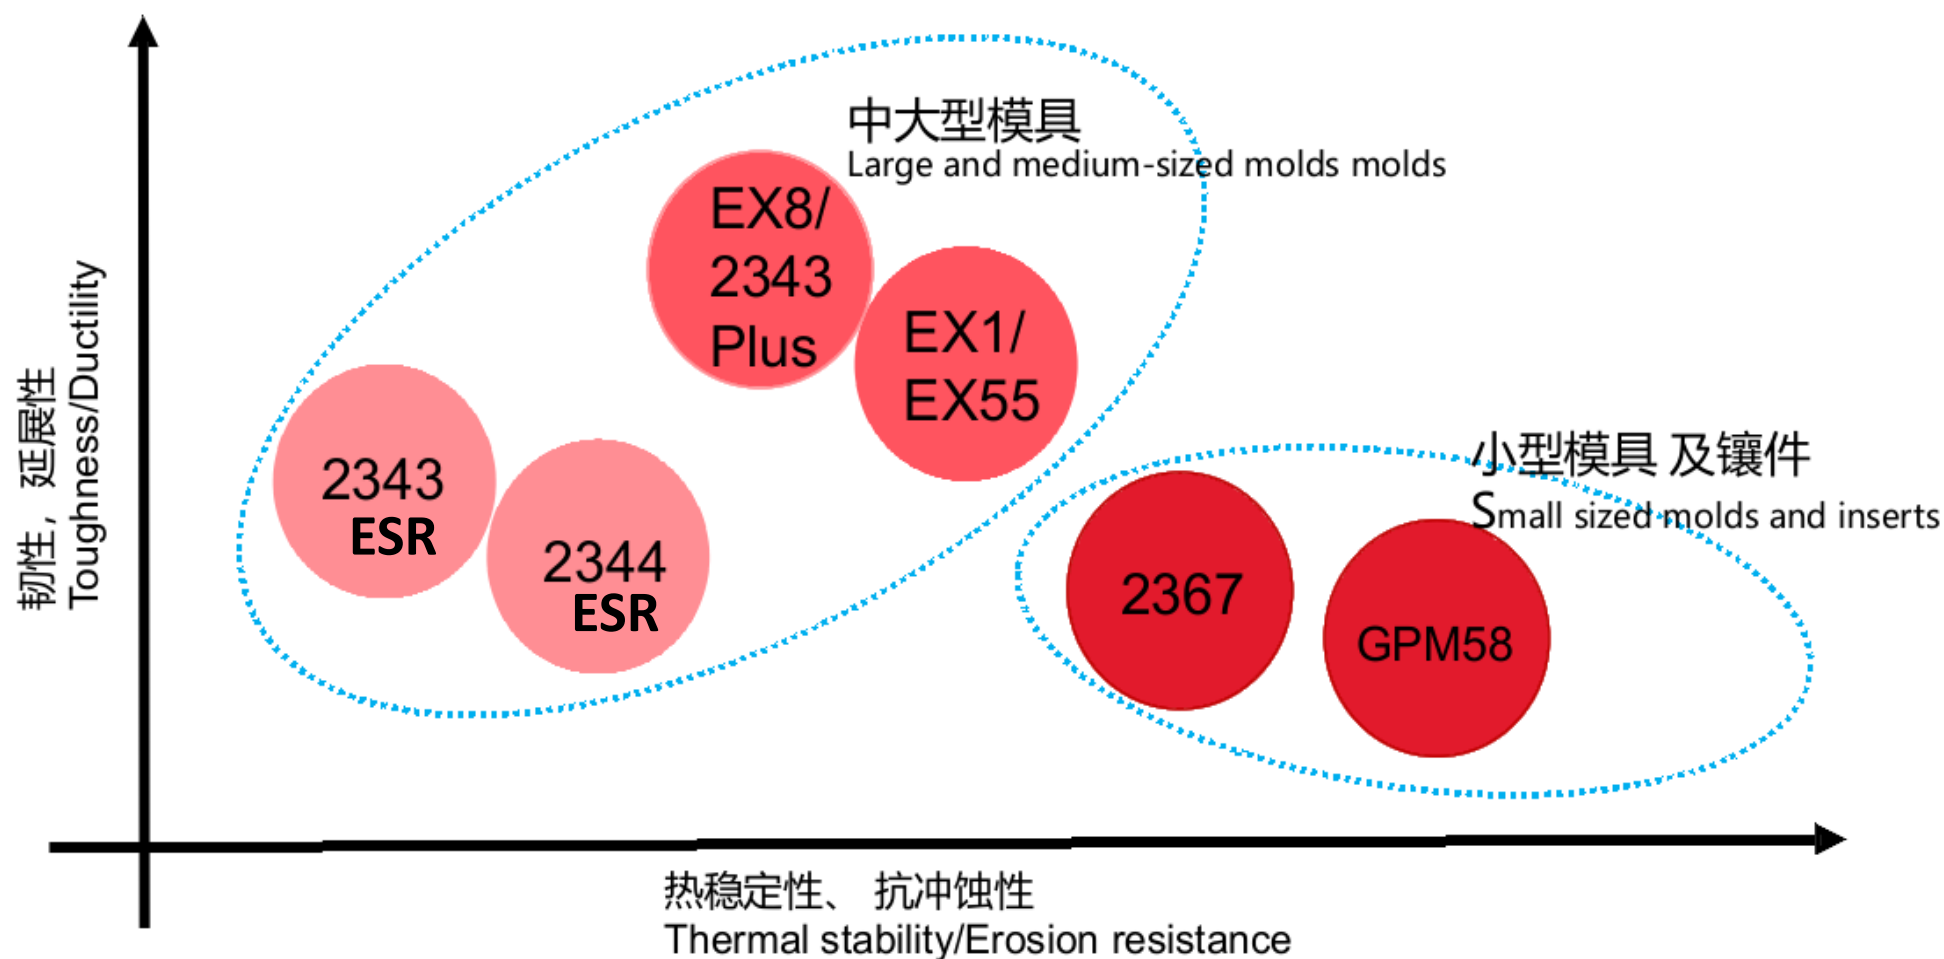



Schmiedewerke Gröditz
GMH GRUPPE



万 润 利
广东 · 山东 · 浙江
— 德国葛利兹专卖


万润利集团

德国葛利兹优质模具钢

中国区专卖

GP GROUPE

Gröditz Tooling Steel
Exclusive Chain Stores



Gröditz Partner



广东万润利模具技术有限公司 (总部)

电话: +86 755 28070708

邮箱: jdb.sgp@groeditz-partner.com

传真: +86 755 28070718

住址: 深圳市宝安区沙井街道南环路 381 号
永昶兴工业区内



浙江万润利模具科技有限公司 (浙江分部)

电话: +86 574 88128168

邮箱: zj.sgp@groeditz-partner.com

住址: 浙江省宁波市鄞州区东吴镇小白村



山东万润利模具科技有限公司 (山东分部)

电话: +86 532 85202262 / 13927781601

邮箱: qd.sgp@groeditz-partner.com

住址: 山东省青岛市胶州市胶西街道办事处
西环外路 160 号内

Guangdong GP Tooling Technology Co., Ltd.

Tel : +86 755 28070708 / Fax : +86 755 28070718

Email : jdb.sgp@groeditz-partner.com

Address : Within Yongchangxing Industrial Park , no 381,
Nanhuan Road, Shajing Street , Bao'an District, Shenzhen,
Guangdong Province, China .

Zhejiang GP Tooling Technology Co., Ltd.

Tel : +86 574 88128168

Email : zj.sgp@groeditz-partner.com

Address : Xiao Bai Village, Dong Wu Town , Yinzhou
District, Ningbo City, Zhejiang Province, China

Shandong GP Tooling Technology Co., Ltd.

Tel : +86 532 85202262 / Mobile : +86 13927781601

Email : qd.sgp@groeditz-partner.com

Address : Within 160 Xihuan Outer Road, Jiaoxi street
office , Jiaozhou City, Qingdao City, Shandong Province,
China .



: 18939801904



: jdb.sgp@groeditz-partner.com



: www.Groeditz-partner.com